### AC/DC 100W Enclosed Switching Power Supply LM100-23BxxR2(-C, -Q, -CQ, -QQ, -CQQ) Series









**RoHS** 

#### **FEATURES**

- Universal 80 305VAC or 100 430VDC input voltage
- Accepts AC or DC input (dual-use of same terminal)
- Operating ambient temperature range: -40°C to +85°C
- Compact size, high power density
- Low standby power consumption, high efficiency
- High I/O isolation test voltage up to 4000VAC
- Low ripple & noise
- Output short circuit, over-current, over-voltage protection
- OVC III (meet EN62477)
- Operating altitude up to 5000m

LM100-23BxxR2 series is the ultra-small Mornsun second-generation new industrial standard enclosed power supply, which has innovated the industrial power supply standard from the aspect of dimension, performance, technology and structure. It features universal AC input and at the same time accepts DC input voltage, cost-effective, low no load power consumption, high efficiency, high reliability and reinforced isolation. These converters offer excellent EMC performance and meet IEC/EN61000-4, CISPR32/EN55032, IEC/UL/EN/BS EN62368, EN60335, EN61558, EN62477, GB4943. standards and they are widely used in areas of industrial, LED, street light control, electricity, security, telecommunications, smart home etc.

Certification	Part No.*	Output Power (W)	Nominal Output Voltage and Current (Vo/lo)	Output Voltage Adjustable Range (V)	Efficiency at 230VAC (%) Typ.	Capacitive Load
		(۷۷)	ana cunem (vo/io)	Adjustable Ratige (V)	230VAC (%) Typ.	(ur) iviax.
	LM100-23B05R2	90	5V/18A	4.75-5.75	87.0	10000
	LM100-23B12R2	102	12V/8.5A	11.4-13.8	90.0	6800
	LM100-23B15R2	105	15V/7.0A	14.25-17.25	90.0	3300
EN/CCC (Pending)	LM100-23B24R2	108	24V/4.5A	22.8-27.6	90.5	2200
(i enaing)	LM100-23B36R2	100.8	36V/2.8A	34.2-41.4	90.5	1000
	LM100-23B48R2	110.4	48V/2.3A	43.2-52.8	91.5	470
	LM100-23B54R2	102.6	54V/1.9A	51.3-56.7	91.5	220

Input Specifications								
Item	Operating Cond	Operating Conditions		Min.	Тур.	Max.	Unit	
Innert Valtares Dennes	AC input				80	_	305	VAC
Input Voltage Range	DC input	DC input			100	-	430	VDC
Input Voltage Frequency				47		63	Hz	
Input Current	115VAC	115VAC				3		
inpui Curieni	230VAC	230VAC						1.5
	115VAC	Cole	0-1-1-44		35		A	
Inrush Current	230VAC	Cold	Cold start			65		
Leakage Current	277VAC	277VAC				<0.7	75mA	
Hot Plug						Unav	ailable	

Output Specifications						
Item	Operating Conditions	Operating Conditions		Тур.	Max.	Unit
Output Voltage Appurage	Full load range 5V 12V/15V/24V/36V/48V/54V	5V		±2	-	
Output Voltage Accuracy			±1		%	
Line Regulation	Rated load			±0.5	-	

**MORNSUN®** 

MORNSUN Guangzhou Science & Technology Co., Ltd.

# AC/DC 100W Enclosed Switching Power Supply LM100-23BxxR2(-C, -Q, -CQ, -QQ, -CQQ) Series



Land Danidakkan	00/ 1000/ 1	5V		±1	-		
Load Regulation	0% - 100% load	12V/15V/24V/36V/48V/54V	-	±0.5			
	230V, Rated load;	5V	-	150			
Dissala 9. Naisa*		12V/15V		120	_		
Ripple & Noise*	20MHz bandwidth (peak-to-peak value)	24V		150		mV	
	(pount to pount tundo)	36V/48V/54V		200			
Temperature Coefficient				±0.03		%/℃	
Minimum Load			0	-		%	
Stand-by Power Consumption				0.3	0.5	W	
I lalal Tina a	115VAC			10		ms	
Hold-up Time	230VAC			55			
Short Circuit Protection	Recovery time <5s after	r the short circuit disappear.	Hiccu	Hiccup, continuous, self-recovery			
Over-current Protection			115% - :	115% - 200% Io, Hiccup, self-recover			
	5V		≤7.5VDC (Clamp		np, self-recovery)		
	12V 15V			≤19.2VDC (Hiccup, self-recovery)			
				≤24VDC (Hiccup, self-recovery)			
Over-voltage Protection	24V			≤38.4VDC (Hiccup, self-recovery)			
	36V			≤57.6VDC (Hiccup, self-recovery)			
	48V		≤60VDC (Clamp, self-recovery)				
	54V	≤70\	≤70VDC (Hiccup, self-recovery)				

Note: \*The "Tip and barrel method" is used for ripple and noise test, output parallel 47uF electrolytic capacitor and 0.1uF ceramic capacitor, please refer to Enclosed Switching Power Supply Application Notes for specific information.

Item		Operating Conditions		Min.	Тур.	Max.	Unit	
	Input - 🕀	Electric strength test	for 1min., leakage current <10mA	2000		-		
Isolation	Input - output	Electric strength test	4000			VAC		
	Output -	Electric strength test	1250					
111	Input - 🕀			100				
Insulation Resistance	Input - output	Test voltage at 500VI	Test voltage at 500VDC			-	<b>M</b> Ω	
	Output -					_	-	
Operating Ter	mperature			-40		+85		
Storage Temp	erature			-40		+85	°C	
Operating Hu	midity			20	_	90		
Storage Humidity Switching Frequency		Non-condensing		10	_	95	%RH	
					80	_	kHz	
		+45℃ to +70℃	5V	1.60		_		
		+50°C to +70°C	12V/15V/24V/36V/48V/54V	2.00		_		
D D		+70℃ to +85℃		2.00			<b>%/</b> ℃	
Power Deratir	ng	-40°C to -30°C		5.00	_	_		
		80VAC - 100VAC		1.25	_	_		
Safety Standard		277VAC - 305VAC		0.71	_	_	%/VAC	
						JL/EN/BS EN -1, EN62477		
Safety Class				CLASS I				
MTBF				MIL-HDBK-	-217F@25℃	>300,000	h	


## AC/DC 100W Enclosed Switching Power Supply LM100-23BxxR2(-C, -Q, -CQ, -QQ, -CQQ) Series




Mechanical Sp	Mechanical Specifications		
Case Material	Metal (AL5052, SGCC)		
Dimensions	99.00 x 97.00 x 30.00 mm		
Weight	260g (Typ.)		
Cooling Method	Free air convection		

Electromagnetic Compatibility (EMC)						
	CE	CISPR32/EN55032	CLASS B			
Emissions	RE	CISPR32/EN55032	CLASS B			
	Harmonic current	IEC/EN61000-3-2	CLASS A			
	ESD	IEC/EN61000-4-2	Contact ±6KV/Air ±8KV	perf. Criteria A		
	RS	IEC/EN61000-4-3	10V/m	perf. Criteria A		
	EFT	IEC/EN61000-4-4	±4KV	perf. Criteria A		
Immunity	Surge	IEC/EN61000-4-5	line to line ±2KV/line to PE ±4KV	perf. Criteria A		
,	CS	IEC/EN61000-4-6	10 Vr.m.s	perf. Criteria A		
	PFMF	IEC/EN61000-4-8	30A/m	perf. Criteria A		
	Voltage dip, short interruption and voltage variation	IEC/EN61000-4-11	0%, 70%	perf. Criteria B		


#### **Product Characteristic Curve**






Note: 1. With an AC input voltage between 80 -100VAC/277-305VAC and a DC input between 100 -140VDC/390-430VDC the output power must be derated as per the temperature derating curves;

2. This product is suitable for applications using natural air cooling; for applications in closed environment please consult Mornsun FAE.

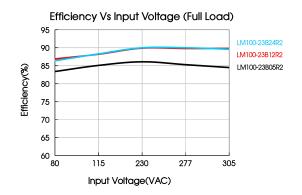


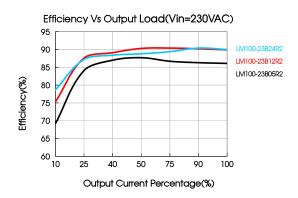




#### Dimensions and Recommended Layout

#### LM100-23BxxR2(-Q, -QQ) Series

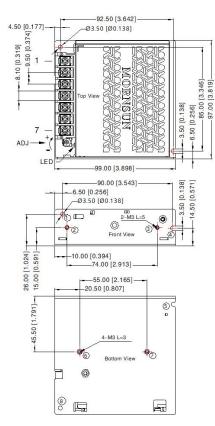




Pi	Pin-Out			
Pin	Function			
1	AC(L)			
2	AC(N)			
3	<b>(a)</b>			
4	-Vo			
5	-Vo			
6	+Vo			
7	+Vo			

THIRD ANGLE PROJECTION

(1)-(8) any position must be connected to the earth( (1))

Position	Screw Spec.	L(max)	Torque(max)		
2-3	M3	5mm	0.4N · m		
<b>6</b> -7	МЗ	3mm	0.4N · m		



Note:

Unit: mm[inch]

ADJ: Output adjustable resistor

Wire range: Input: 20-10AWG(16-10AWG for pin3)

Output: 5V: 10AWG


12V, 15V: 14-10AWG 24V, 36V: 17-10AWG 48V, 54V: 20-10AWG

Connector tightening torque: M3.5, Max 0.8N · m


General tolerances:  $\pm 1.00[\pm 0.039]$ 



#### LM100-23BxxR2-C (-CQ, -CQQ) Series

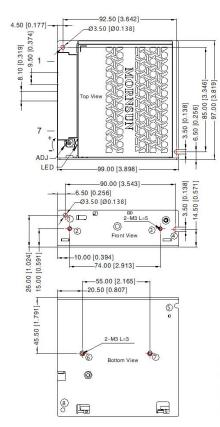


### THIRD ANGLE PROJECTION



 $\widehat{\mathbb{1}}$  –  $\widehat{\mathbb{8}}$  any position must be connected to the earth(  $\widehat{\underline{\ \oplus}}$  )

	Position	Screw Spec.	L(max)	Torque(max)
	2-3	M3	5mm	0.4N · m
ĺ	<b>⑥ −</b> ⑦	МЗ	3mm	0.4N · m



Note:

Unit: mm[inch]

ADJ: Output adjustable resistor

Wire range: Input: 20-10AWG(16-10AWG for pin3)

Output: 5V: 10AWG

12V, 15V: 14-10AWG 24V, 36V: 17-10AWG 48V, 54V: 20-10AWG

Connector tightening torque: M3.5, Max 0.8N · m

General tolerances:  $\pm 1.00[\pm 0.039]$ 

#### Note:

- 1. For additional information on Product Packaging please refer to <a href="www.mornsun-power.com">www.mornsun-power.com</a>. Packaging bag number: 58220269;
- 2. Unless otherwise specified, parameters in this datasheet were measured under the conditions of Ta=25°C, humidity<75%RH with nominal input voltage and rated output load;
- 3. The room temperature derating of  $5^{\circ}$ C/1000m is needed for operating altitude greater than 2000m;
- 4. All index testing methods in this datasheet are based on our company corporate standards;
- In order to improve the efficiency at high input voltage, there will be audible noise generated, but it does not affect product performance and reliability;
- 6. We can provide product customization service, please contact our technicians directly for specific information;
- 7. Products are related to laws and regulations: see "Features" and "EMC";
- 8. The out case needs to be connected to the earth  $\stackrel{(\!\pm\!)}{}$  of system when the terminal equipment in operating;
- 9. The output voltage can be adjusted by the ADJ, clockwise to increase;
- 10. Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units;
- 11. The power supply is considered a component which will be installed into a terminal equipment. All EMC tests should be confirmed with the final equipment. Please consult our FAE for EMC test operation instructions.

### Mornsun Guangzhou Science & Technology Co., Ltd.

Address: No. 5, Kehui St. 1, Kehui Development Center, Science Ave., Guangzhou Science City, Huangpu District, Guangzhou, P. R. China Tel: 86-20-38601850 Fax: 86-20-38601272 E-mail: info@mornsun.cn www.mornsun-power.com

**MORNSUN®** 

MORNSUN Guangzhou Science & Technology Co., Ltd.